




SINGLE MOUNTING (TYPICAL)

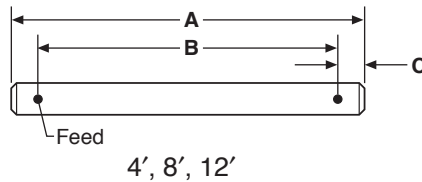

ROW MOUNTING

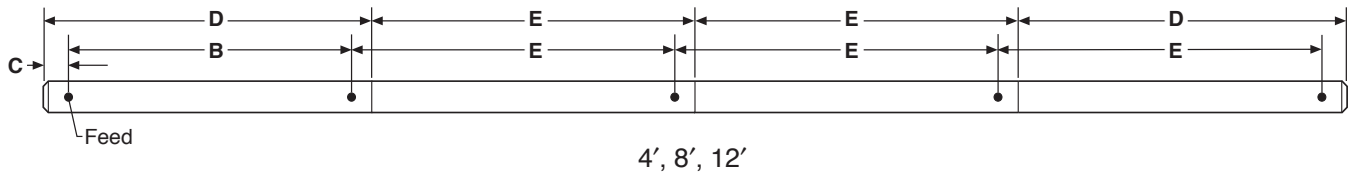


FACTORY STANDARD (TYPICAL ROW)



DATA CHART

	Nominal Length	Weight	A	B	C	D	E
Flat End Cap	4'	23 lbs	50 ⁷ / ₈ "	49"	3 ¹ / ₃₂ "	50 ³ / ₄ "	50 ⁵ / ₈ "
	8'	43 lbs	99 ¹ / ₂ "	97 ⁹ / ₁₆ "	3 ¹ / ₃₂ "	99 ⁵ / ₁₆ "	99 ¹ / ₈ "
	12'	62 lbs	147 ¹⁵ / ₁₆ "	146 ¹ / ₁₆ "	3 ¹ / ₃₂ "	147 ¹³ / ₁₆ "	147 ¹¹ / ₁₆ "

FIXTURE CONNECTIONS

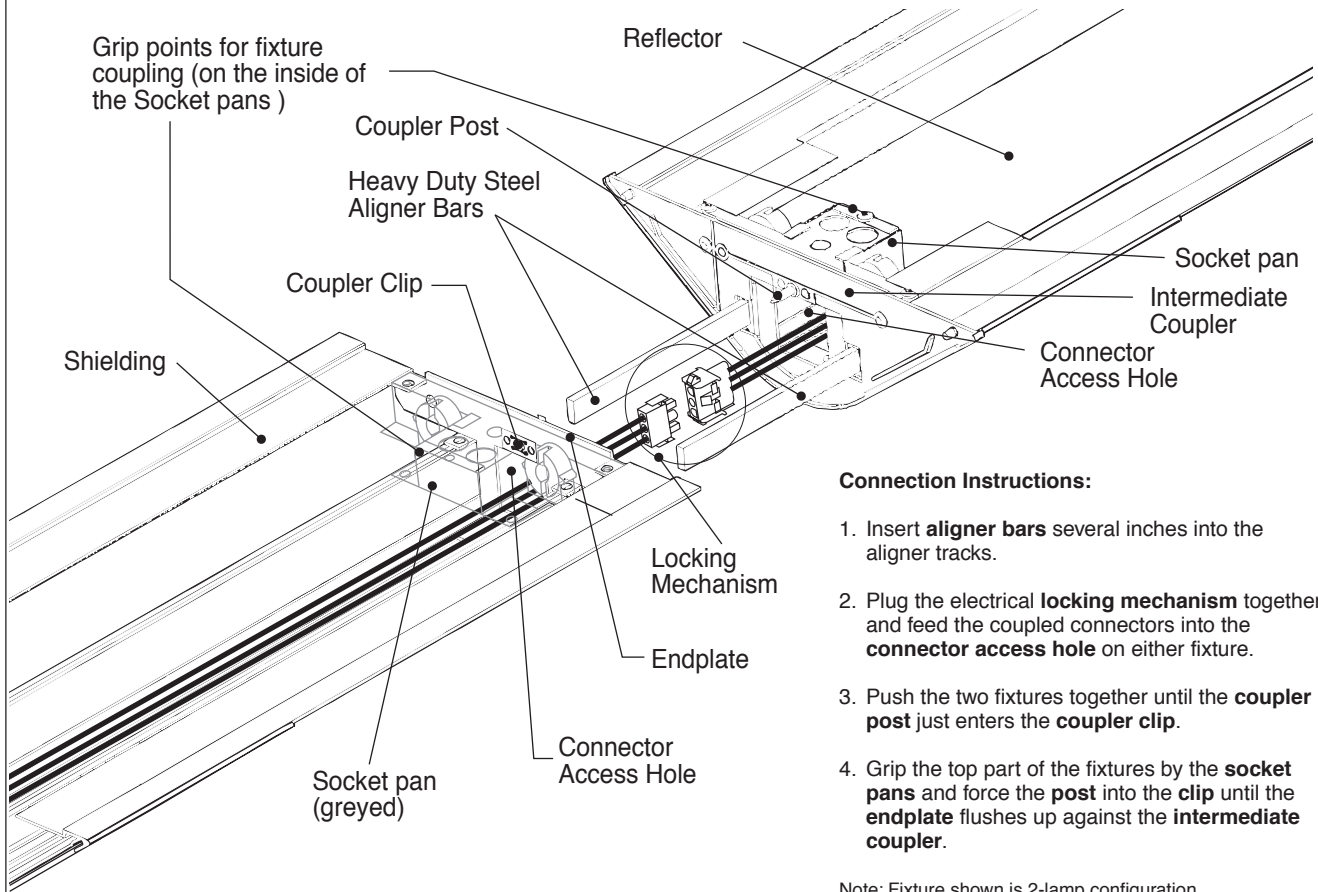

Connection Instructions:

1. Insert **aligner bars** several inches into the aligner tracks.
2. Plug the electrical **locking mechanism** together and feed the coupled connectors into the **connector access hole** on either fixture.
3. Push the two fixtures together until the **coupler post** just enters the **coupler clip**.
4. Grip the top part of the fixtures by the **socket pans** and force the **post** into the **clip** until the **endplate** flushes up against the **intermediate coupler**.

Note: Fixture shown is 2-lamp configuration.

CONNECTORS

CONTACT FACTORY