

CVSL/CVPL WM

curVista Wall Mount



curVista



CVPL shown.



FEATURES


- Constructed of heavy 20-gauge steel
- Companion fixture for elegant curVista product
- May also be used as companion to Cûrv or Cûrv Louvered products
- Solid or perforated side louver shield downlight with aesthetic appeal
- 2½" × 6¼" profile maintains a sleek aesthetic
- Flat end caps standard (⅝")
- One or two T8, T5, or T5HO lamps in cross section
- Control compatible for daylighting photocells, occupancy sensors, or dimming systems (small case required)
- Installs easily using the universal wall mounting system (Wall bracket painted matte white unless otherwise specified)
- UL listed 1598. Damp label available on most models
- Available with exclusive wiHUBB technology preinstalled (WIH option)
 - Peer to peer, self-healing wireless mesh network
 - Integrated control system for 0-10VDC or step dimming, or On/Off

ORDERING INFORMATION


[] - [] - [] - [] - WM - [] - [] - [] - []					
MODEL	DISTRIBUTION ⁴	MOUNTING METHOD	VOLTAGE	FINISH	OPTIONS
CVSL curVista Solid Baffle	40/60 40% Uplight, 60% Downlight	WM Wall Mount	U 120V-277V	MW Matte White (Std.)	DC Dust Cover (N/A T5HO) ⁴
CVPL curVista Perforated Baffle	50/50 50% Uplight, 50% Downlight Olay Overlay		120 120V 277 277V 347 347V	GW Gloss White ZT ZET Metallic Silver	SCE Sculpted Cûrv End Cap (5⅝") BN Bull Nose End Cap (5⅝") LR Left/Right Switching (2-Lamp only) IBOB Inboard/Outboard Switching (3-Lamp only) EL One Emergency Battery Pack ^{1,2,3}
ROW LENGTH	LAMP TYPE & PROFILE	BALLAST	See page 183 for other color selections.		
4 4' Single	1T5 1 T5 Lamp	E Electronic, Instant Start (Std. for T8)			
8 8' Single	2T5 2 T5 Lamps	EP Electronic, Programmed Start (Std. for T5 & T5HO, optional for T8)			
— Indicate row length over 8' in 4' increments	1T5HO 1 T5HO Lamp 2T5HO 2 T5HO Lamps	ED Electronic, Dimming (Must specify)			
Note: Rows over 8' will be configured by Alera. Example: 16' will be (2) 8'. Alternate configurations: contact factory.	1T8 1 T8 Lamp 2T8 2 T8 Lamps	ESD Electronic, Step Dimming	Unless specified, Alera will use fewest ballasts possible.		

¹Specify voltage. For additional, specify quantity before nomenclature (Example: 2EL120).
²Not available with all configurations; some limitations apply. Contact factory for details.
³One extra feed drop per row with through wiring. (Standard is one 4ft lamp per circuit.)
⁴Ships separately.

CROSS SECTIONS

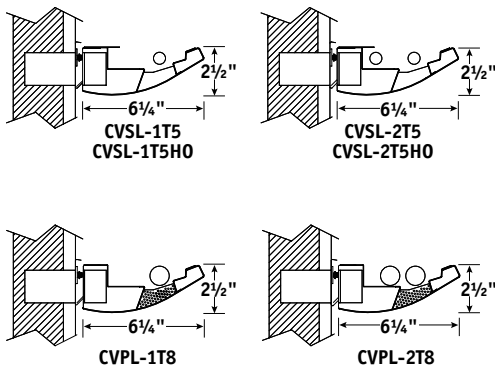

MOUNTING INFORMATION

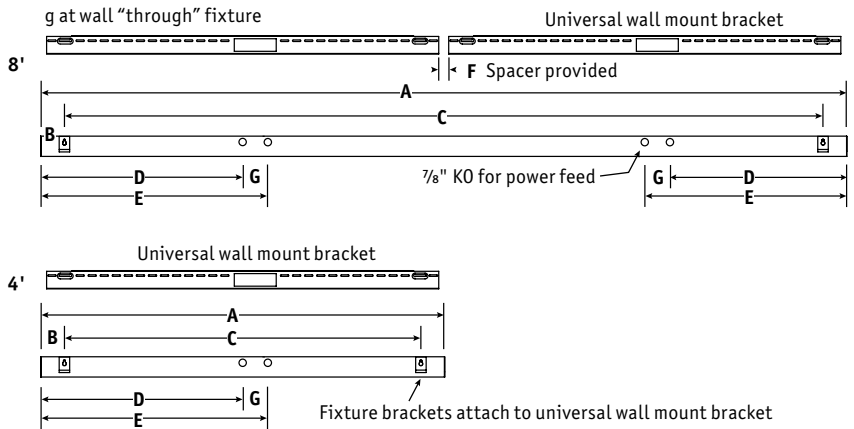

DATA CHART

NOMINAL LENGTH	APPROX. WEIGHT (LBS.)	1-LAMP						
		A*	B	C	D	E	F	G
4'	8	48⅞"	2⅜"	42½"	24⅞"	27⅞"	1⅜"	3"
8'	16	96⅞"	2⅜"	90⅞"	24⅞"	27⅞"	1⅜"	3"

*Note: Fixtures mounted in rows require two mounting locations per fixture. SCE end caps add 10⅞". BN adds 10⅞". Standard flat end caps add ⅝" to overall row length.

Definitions on page 182.

