



FEATURES


- Specular aluminum wings add sparkle to the fixture
- Extruded aluminum housing provides rigidity and complements the aluminum wings
- Choice of slotted, perforated, or solid wings for design flexibility
- Specially textured or standard RAL colors are available as an option on both the housing and wings
- Patented die cast aluminum end caps and couplers enable fixtures to be connected for a seamless and straight appearance (Patent# 6,796,676B2)
- With the use of up to three T8, T5, or T5HO lamps and a highly specular reflective system, IndiQuest can be used in a multitude of different office spaces
- UL listed 1598. Damp label available on most models

ORDERING INFORMATION

IQ	-	-	-	-	-	-	-	-	-
MODEL	WING TYPE	SUSPENSION LENGTH (CM)	VOLTAGE	FINISH	OPTIONS	ROW LENGTH	LAMP TYPE & PROFILE	MOUNTING METHOD	BALLAST
IQ IndiQuest	PERF Perforated Wing S Solid Wing HSLT Horizontal Slot – Steel Wing VSLT Vertical Slot – Steel Wing	48 48" 96 96" 144 144" Not applicable for wall mount. Other lengths available on request.	U 120V -277V 120 120V 277 277V 347 347V	BSC Bonded Silver Crinkle (Std.) MW Matte White See page 183 for other color selections.	DC Dust Cover (N/A T5HO) NAL Natural Anodized Aluminum on the Wings MWAL Matte White Aluminum on the Wings. Contact factory for other wing finishes. LR Left/Right Switching (2-Lamp only) IBOB Inboard/Outboard Switching (3-Lamp only) EL One Emergency Battery Pack ^{1,2} EMC One Emergency Circuit ^{1,2,3} NLC Night Light Circuit ^{1,2,3} GLR Fast Blow Fuse GMF Slow Blow Fuse TBAR T-Bar Mounting Clip CSA UL listed or CSA certified for Canada DL Damp Label (Available on most models)	4 4' Single 8 8' Single — Indicate row length over 8' in 4' increments Note: Rows over 8' will be configured by Alera. Example: 16' will be (2) 8'. Alternate configurations: contact factory.	1T5 1 T5 Lamp 2T5 2 T5 Lamps 3T5 3 T5 Lamps (CM only) 1T5HO 1 T5HO Lamp 2T5HO 2 T5HO Lamps 3T5HO 3 T5HO Lamps (CM only) 1T8 1 T8 Lamp 2T8 2 T8 Lamps 3T8 3 T8 Lamps (CM only)	CM Adjustable Aircraft Cable Mount (Std.) WM Wall Mount	E Electronic, Instant Start (Std. for T8) EP Electronic, Programmed Start (Std. for T5 & T5HO, optional for T8) ED Electronic, Dimming (Must specify) ESD Electronic, Step Dimming Unless specified, Alera will use fewest ballasts possible.

¹Specify voltage. For additional, specify quantity before nomenclature (Example: 2EL120).
²Not available with all configurations; some limitations apply. Contact factory for details.
³One extra feed drop per row with through wiring. (Standard is one 4ft lamp per circuit.)


CROSS SECTIONS

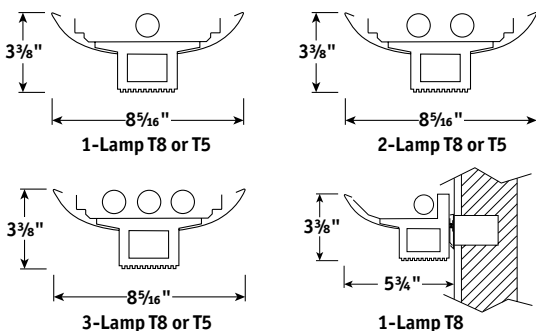

Name:	IQ-1T5HO-S-EP
Test #:	12966
Efficiency:	99.3%
LER:	83

Definitions on page 182.

MOUNTING INFORMATION

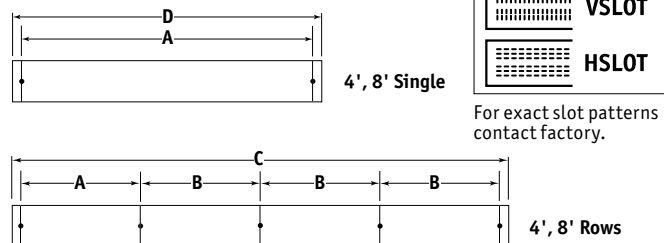

DATA CHART

NOMINAL LENGTH	APPROX. WEIGHT (LBS.)						
	1-LAMP	2-LAMP	3-LAMP	A	B	C	D
4'	10	10	10	47 1/2"	48"	193"	49"
8'	20	20	20	95 1/2"	96"	385"	97"

Note: Suspension data is computed using the standard aircraft cable assembly. The use of rigid stems will yield different data. Please consult factory for stem data.