

IT9

9" Diameter Tube

TUBES




FEATURES

- Fully extruded housing and aluminum end caps ensure the entire unit is rigid and straight
- Housing end caps are welded which results in a seamless appearance
- Available in lengths up to 12'. For longer rows, contact factory
- A variety of shielding options make the system usable for almost any application
- All internal components are painted gloss white for maximum photometric performance
- Standard finish is powder coat matte white. Other optional color finishes are available
- UL listed 1598. Damp label available on most models

ORDERING INFORMATION

MODEL	LAMP PROFILE & DISTRIBUTION	LAMP TYPE	SUSPENSION LENGTH	DOWNLIGHT SHIELDING	VOLTAGE	FINISH
IT9 9" Diameter Tube	1U 1-Lamp Uplight 2U 2-Lamp Uplight 3U 3-Lamp Uplight 1AU 1-Lamp Asymmetric Uplight ¹ 2AU 2-Lamp Asymmetric Uplight ¹ 3AU 3-Lamp Asymmetric Uplight ¹ 1D 1-Lamp Downlight 2D 2-Lamp Downlight 3D 3-Lamp Downlight 1AD 1-Lamp Asymmetric Downlight 2AD 2-Lamp Asymmetric Downlight 3AD 3-Lamp Asymmetric Downlight 1ADR 1-Lamp Asymmetric Downlight, Room Distr. ¹ 2ADR 2-Lamp Asymmetric Downlight, Room Distr. ¹ 1ADW 1-Lamp Asymmetric Downlight, Wall Distr. ¹ 2ADW 2-Lamp Asymmetric Downlight, Wall Distr. ¹ 1U2D 1-Lamp Uplight, 2-Lamp Downlight 2U2D 2-Lamp Uplight, 2-Lamp Downlight 3U2D 3-Lamp Uplight, 2-Lamp Downlight 3U3D 3-Lamp Uplight, 3-Lamp Downlight	T5 T5 ² T5H0 T5H0 ² T8 T8	48 48" 96 96" Not applicable for wall mount. Other lengths available on request.	CLA Clear Prismatic Acrylic Lens ³ WCB White Cross Baffle U Unshielded	U 120V-277V 347 347V	MW Matte White (Std.) ZT ZET Metallic Silver See page 185 for other color selections.
ROW LENGTH	MOUNTING METHOD	UPLIGHT SHIELDING	BALLAST	OPTIONS		
4 4' Single 8 8' Single 12 12' Single — Indicate row length over 8' in 4' increments Note: Rows over 8' will be configured by Alera. Example: 16' will be (2) 8'. Alternate configurations: contact factory.	CM Adjustable Aircraft Cable PM Pendant Mount WM Wall Mount See pages 180-181 for other hanging methods.	CLA Clear Prismatic Acrylic Lens ³ U Unshielded	E Electronic, Instant Start (Std. for T8) EP Electronic, Programmed Start (Std. for T5 & T5H0, optional for T8) ED Electronic, Dimming (Must specify) ESD Electronic, Step Dimming Unless specified, Alera will use fewest ballasts possible.	RT Rotatable Housing LR Left/Right Switching ⁴ IBOB Inboard/Outboard Switching (3-Lamp only) UB Upper Lower Switching ⁴ EL One Emergency Battery Pack ^{5,6} EMC One Emergency Circuit ^{6,7} NL Night Light Circuit ^{6,7} GLR Fast Blow Fuse GMF Slow Blow Fuse TBAR T-Bar Mounting CSA UL listed or CSA certified for Canada DL Damp Label (Available on most models)		

CROSS SECTIONS

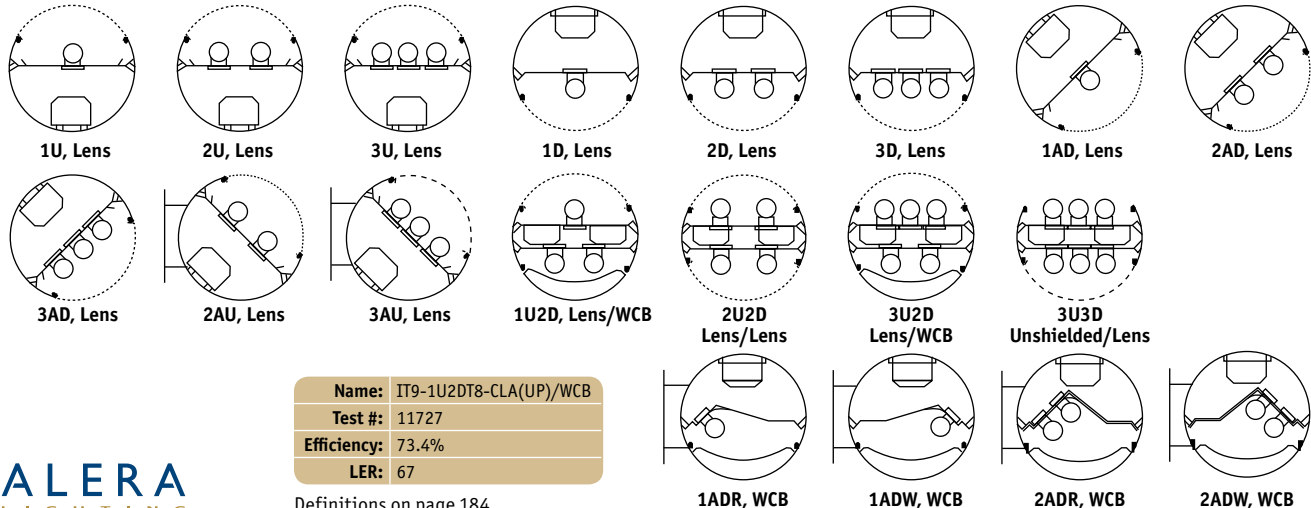

Name:	IT9-1U2DT8-CLA(UP)/WCB
Test #:	11727
Efficiency:	73.4%
LER:	67

Definitions on page 184.

