

# MA - APCS

## Microlyne® Asymmetric For A+CLASS

NEW



MICROLYNE  
RECTILINEAR FAMILY

### FEATURES

- Asymmetric Distribution for Whiteboard Lighting
- 3.5" x 3.5" minimalist rectilinear shape
- 1T8 standard. For T5 or T5HO contact factory
- Full family including cable mount, wall mount, surface mount and recessed
- High efficiency
- In-row quick-connect wiring provided standard for continuous rows
- Modular mounting points for convenient hanging locations
- UL Listed 1598, damp label available on most models
- CUL US
- Heavy 20-gauge construction provides excellent housing rigidity; patented die cast aluminum joiners ensure excellent row integrity (Patent# 6,796,676B2)
- 120 or 277V

### ORDERING INFORMATION A+CLASS™ MA LIGHTING

<b>M</b>	<b>A</b>	-		-		-		-	<b>EP</b>		-	
<b>MODEL</b>	<b>ROW LENGTH</b>	<b>ROW PATTERN</b>		<b>MOUNTING METHOD</b>	<b>SUSPENSION LENGTH (CM)</b>	<b>VOLTAGE</b>		<b>OPTIONS</b>				
<b>M</b> Microlyne® (3½") High Performance Lighting	<b>4</b> 4' Single <b>8</b> 8' Single <b>12</b> 12' Single — Indicate row length in 4' increments <sup>1, 2</sup>	<b>Blank</b> Straight		<b>CM</b> Adj. Aircraft Cable Mount <b>SM</b> Surface Mount <b>WM</b> Wall Mount	<b>48</b> 48" <b>96</b> 96"	<b>U</b> 120V-277V <b>120</b> 120V <b>277</b> 277V		<b>EL</b> 1 Emergency Battery Pack Per Row <sup>4, 5</sup> <b>GLR</b> Fast Blow Fuse <b>GMF</b> Slow Blow Fuse <b>TBAR</b> T-Bar Mounting <b>CSA</b> UL listed or CSA certified for Canada <b>DL</b> Damp Label (Available on most models)				
<b>SYM/ASYM</b>		<b>LAMP TYPE &amp; PROFILE</b>		<b>DOWNLIGHT SHIELDING</b>		<b>BALLAST</b>		<b>FINISH</b>				
<b>A</b> Asymmetric Louver		<b>1DT8</b> 1 T8 Lamp Standard <b>1DT5</b> 1 T5 Lamp <sup>3</sup> <b>1DT5HO</b> 1 T5HO Lamp <sup>3</sup>		<b>HEP</b> High Efficiency Parabolic Specular Louver (15 Cell) Standard <b>M4R</b> 95% Reflective Specular Aluminum Louver (24 Cell) Optional		<b>EP</b> Electronic, Programmed Start		<b>MW</b> Matte White (Std.) <b>ZT</b> ZET Metallic Silver Additional RAL colors available. Contact factory.				

<sup>1</sup> Rows over 12' will be configured by Alera. Example: 16' will be (2) 8'. For alternate configurations, contact factory.


<sup>2</sup> Shorter increments are available—contact factory.

<sup>3</sup> T5/T5HO lamps may cause visible socket shadow in down light component. (MA - STG recommended)

<sup>4</sup> Specify voltage. For additional, specify quantity before nomenclature (Example: 2EL120).

<sup>5</sup> Not available with all configurations; some limitations apply. Contact factory for details.

### CROSS SECTIONS

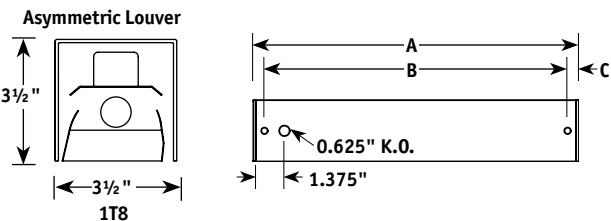

### DATA CHART

NOMINAL LENGTH	WEIGHT	A	B	C	D	E	F
4'	18 lbs.	48¾"	47"	1½/16"	47"	48"	192¾"
8'	31 lbs.	96¾"	95"	1½/16"	95"	96"	384¾"
12'	44 lbs.	144¾"	143"	1½/16"	143"	144"	576¾"

