

# PLK WM ASYM

## Plank Wall Mount Asymmetric

### FEATURES

- Asymmetric distribution
- T5 or T5HO compatible
- Attractive cable/bracket support mount
- Decorative perforated, slotted, or patterned strips on either side of shielding for added visual interest
- Integral small case ballasting
- Control compatible for daylight harvesting, occupancy sensors, or dimming
- Flat end caps standard
- Mounting to wall (WM) by universal wall bracket. Bracket painted standard white unless otherwise specified
- Additional aircraft cable support option also available (WMC)
- UL listed 1598. Damp label available on most models




BEAMS

### ORDERING INFORMATION


<b>PLK</b>			<b>ASYM</b>		<b>OA</b>				
<b>MODEL</b>	<b>LAMP TYPE &amp; PROFILE</b>	<b>HOUSING TYPE</b>	<b>SHIELDING</b>	<b>VOLTAGE</b>	<b>OPTIONS</b>				
PLK Plank	1T5AUD 1 T5 Lamp 1T5HOAUD 1 T5HO Lamp	ASYM Asymmetric Housing	OA Opal Acrylic Lens	U 120V-277V 120 120V 277 277V 347 347V	EL One Emergency Battery Pack <sup>1,2</sup> EMC One Emergency Circuit <sup>1,2,3</sup> NLC Night Light Circuit <sup>1,2,3</sup> GLR Fast Blow Fuse GMF Slow Blow Fuse CSA UL listed or CSA certified for Canada DL Damp Label (Available on most models)				
<b>ROW LENGTH</b>	<b>MOUNTING METHOD</b>	<b>BALLAST</b>	<b>FINISH</b>						
4 4' Single 8 8' Single — Indicate row length over 8' in 4' increments	WM Wall Mount WMC Wall Mount with Cable	EP Electronic, Programmed Start (Std. for T5 & T5HO) ED Electronic, Dimming (Must specify) ESD Electronic, Step Dimming Unless specified, Alera will use fewest ballasts possible.	MW Matte White (Std.) ZT ZET Metallic Finish						
<p><b>Note:</b> Rows over 12' will be configured by Alera. Example: 16' will be (2) 8'. Alternate configurations: contact factory.</p>									

<sup>1</sup>Specify voltage. For additional, specify quantity before nomenclature (Example: 2EL120).  
<sup>2</sup>Not available with all configurations; some limitations apply. Contact factory for details.  
<sup>3</sup>One extra feed drop per row with through wiring. (Standard is one 4ft lamp per circuit.)

### MOUNTING INFORMATION

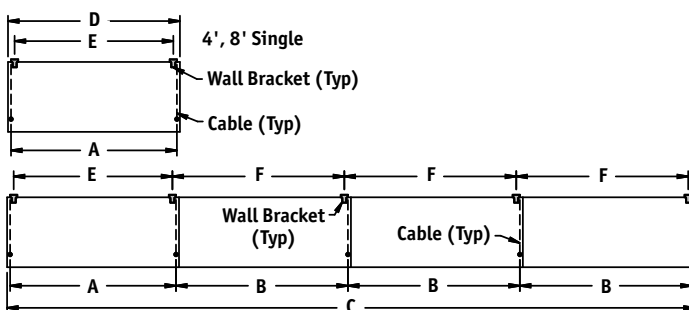

### CROSS SECTIONS



### DATA CHART

NOMINAL LENGTH	APPROX. WEIGHT						
	1-LAMP	A	B	C	D	E	F
4'	17 lbs.	47 3/4"	48"	192 5/8"	48 5/8"	45 1/4"	48"
8'	28 lbs.	95 1/4"	96"	384 5/8"	96 5/8"	93 1/4"	96"

Note: Suspension data is computed using the standard aircraft cable assembly. The use of rigid stems will yield different data. Please consult factory for stem data.

<b>Name:</b>	PLK-1T5HOAUD-ASYM-WM
<b>Test #:</b>	14522
<b>Efficiency:</b>	79.7%
<b>LER:</b>	58

Definitions on page 182.

