


WMP

Wall Mounted Perforated

CURVES

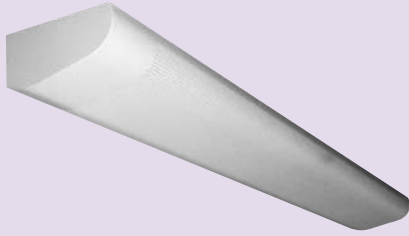

FEATURES



- Perforated housing provides a contemporary appearance for today's modern interiors
- Product available with either T8, T5, or T5HO lamps
- Heavy 20-gauge steel construction for excellent housing rigidity
- Unique connection method ensures housing seams are minimized and consistent
- Unit mounts flush to wall for use with a 2 × 4 junction box by others
- Specular reflector system provides maximum output with wide distribution
- UL listed 1598. Damp Label available on most models

ORDERING INFORMATION


WMP	-	-	-	WM	-	-	-	-
MODEL	HOUSING TYPE			VOLTAGE	FINISH	OPTIONS		
WMP Wall Mounted Perforated	PERF Perforated	S Solid	AP All Perforated	U 120V-277V	MW Matte White (Std.)	GCO Grounded Convenience Outlet (120V only)	PSW Pull Chain Switch	UB Upper/Lower Switching
	HSLT Horizontal Slot	VSLT Vertical Slot		120 120V	ZT ZET Metallic Silver	EL One Emergency Battery Pack ^{1,2}	EMC One Emergency Circuit ^{1,2,3}	NLC Night Light Circuit ^{1,2,3}
				277 277V	See page 183 for other color selections.	GLR Fast Blow Fuse	GMF Slow Blow Fuse	CSA UL listed or CSA certified for Canada
				347 347V		DL Damp Label (Available on most models)	DC Dust cover ⁴	
ROW LENGTH	LAMP TYPE & PROFILE		MOUNTING METHOD	BALLAST				
4 4' Single	1T5 1 T5 Lamp		WM Wall Mount	E Electronic, Instant Start (Std. for T8)				
8 8' Single	2T5 2 T5 Lamps			EP Electronic, Programmed Start (Std. for T5 & T5HO, optional for T8)				
— Indicate row length over 8' in 4' increments	1T5HO 1 T5HO Lamp			ED Electronic, Dimming (Must specify)				
Note: Rows over 8' will be configured by Alera. Example: 16' will be (2) 8'. Alternate configurations: contact factory.	2T5HO 2 T5HO Lamps			ESD Electronic, Step Dimming	Unless specified, Alera will use fewest ballasts possible.			
	1T8 1 T8 Lamp							
	2T8 2 T8 Lamps							

¹Specify voltage. For additional, specify quantity before nomenclature (Example: 2EL120).
²Not available with all configurations; some limitations apply. Contact factory for details.
³One extra feed drop per row with through wiring. (Standard is one 4ft lamp per circuit.)
⁴Ships separately.


CROSS SECTIONS

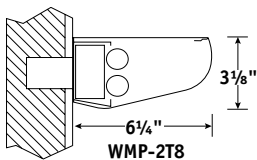


For exact slot patterns contact factory.



Connection Section



End Section




All Perforated Bottom

Name:	WMP-1T8-S-WM-E
Test #:	12589
Efficiency:	74.5%
LER:	56

Definitions on page 182.

MOUNTING INFORMATION

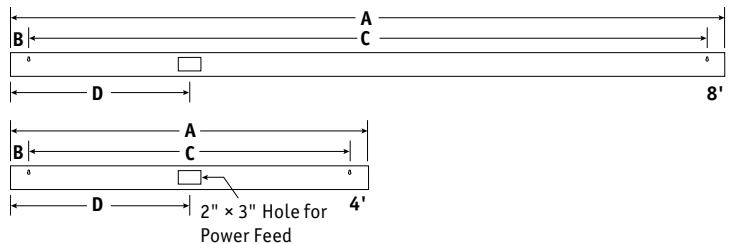

DATA CHART

NOMINAL LENGTH	APPROX. WEIGHT (LBS.) 2-LAMP	DIMENSIONS			
		A	B	C	D
3'	9	36"	3 1/2"	29"	24"
4'	12	48"	3 1/2"	41"	24"
6'	18	72"	3 1/2"	65"	24"
8'	24	96"	3 1/2"	89"	24"

Note: Fixtures mounted in rows require two mounting locations per fixture.
 *End-of-row end caps add 3/32" to the overall row length.