

ARC

Arch




Features



- Extruded aluminum housing
- Concave perforated, slotted, or custom shielding
- Available with either T8, T5, or T5HO lamps
- Contemporary low profile appearance
- End cap selection includes flat (standard) or bull nose (optional)
- Control compatible for daylight harvesting, occupancy sensors, or dimming systems (small case ballast required)
- Modular suspension points offer ease of installation
- Adjustable yoke cable hanger allows vertical adjustments and horizontal balancing
- Patented die cast aluminum couplers and end caps
- Corners available for patterns
- UL listed 1598
- Damp label available on most models

Ordering Information




Example: ARC-28-3T8-CM48-CPF-EU-MW (for 28' row)

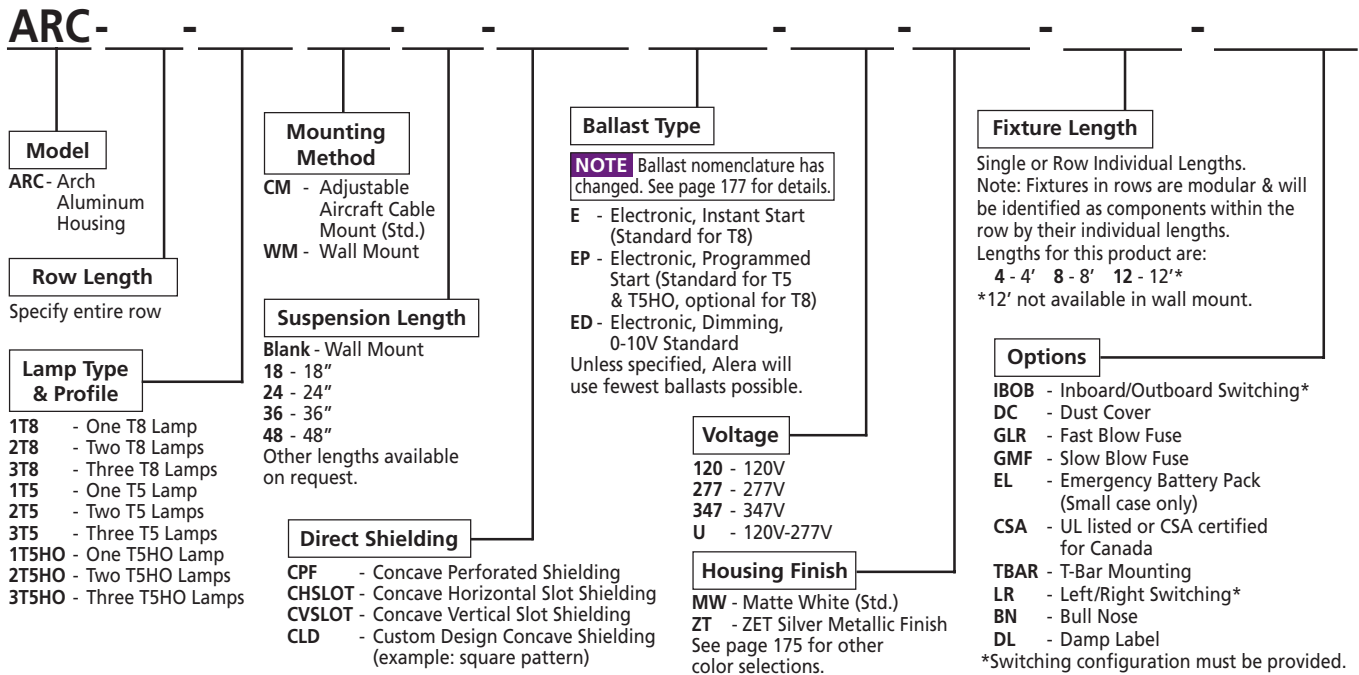

Cross Sections

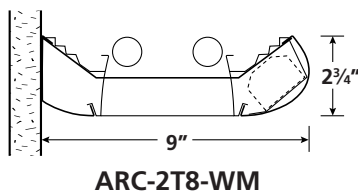

Mounting Information



For exact slot patterns contact factory.

Data Chart - CM

Nominal Length	Approx. Weight			A	B	C	D
	1-lamp	2-lamp	3-lamp				
4'	12 lbs.	12 lbs.	12 lbs.	47 1/2"	48"	192 1/4"	48 1/4"
8'	21 lbs.	21 lbs.	24 lbs.	95 1/2"	96"	384 1/4"	96 1/4"
12'	30 lbs.	33 lbs.	36 lbs.	143 1/2"	144"	576 1/4"	144 1/4"

Note: Suspension data is computed using the standard aircraft cable assembly. The use of rigid stems will yield different data. Please consult factory for stem data.