


IT9

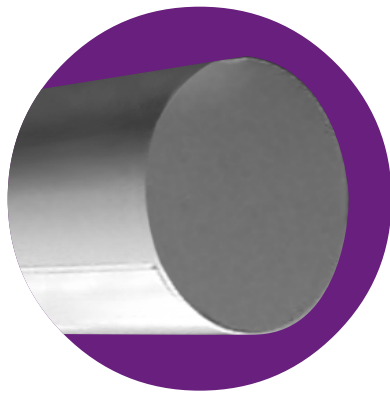

IT9

Features


- 9" tube
- Fully extruded aluminum housing and aluminum end caps ensure the entire unit is rigid and straight
- Housing end caps are welded which results in a seamless appearance
- A variety of shielding options make the system usable for almost any application
- All internal components are painted gloss white for maximum photometric performance
- Standard finish is powder coat matte white. Other optional color finishes are available
- UL listed 1598
- Damp label available

Ordering Information Example: IT9-24-3DT5-CM18-OL-EPU-MW (for 24' row)

IT9 -

Model IT9 - 9" Diameter Tube	Lamp Type T8 - T8 T5 - T5 T5HO - T5HO	Suspension Length 18 - 18" 24 - 24" 48 - 48" NA - Not Applicable (Wall Mount) Other lengths are available on request.	Downlight Shielding CLA - Clear Prismatic Acrylic Lens OL - Opal Prismatic Acrylic Lens WCB - White Cross Baffle U - Unshielded	Voltage 120 - 120V 277 - 277V 347 - 347V U - 120V/277V	Fixture Length Single or Row Individual Lengths. Note: Fixtures in rows are modular & will be identified as components within the row by their individual lengths. Lengths for this product are: 4 - 4' 8 - 8' 12 - 12' (Longer than 12' contact factory)
Row Length Specify entire row	Lamp Profile & Distribution 1U - 1-Lamp Uplight 2U - 2-Lamps Uplight 3U - 3-Lamps Uplight 1AU - 1-Lamp Asymmetric Uplight ¹ 2AU - 2-Lamps Asymmetric Uplight ¹ 3AU - 3-Lamps Asymmetric Uplight ¹ 1D - 1-Lamp Downlight 2D - 2-Lamps Downlight 3D - 3-Lamps Downlight 1AD - 1-Lamp Asymmetric Downlight 2AD - 2-Lamps Asymmetric Downlight 3AD - 3-Lamps Asymmetric Downlight 1ADR - 1-Lamp Asymmetric Downlight, Room Distribution ¹ 2ADR - 2-Lamps Asymmetric Downlight, Wall Distribution ¹ 1ADW - 1-Lamp Asymmetric Downlight, Wall Distribution ¹ 2ADW - 2-LampS Asymmetric Downlight, Wall Distribution ¹ 1U2D - 1-Lamp Uplight, 2-Lamps Downlight 2U2D - 2-Lamps Uplight, 2-Lamps Downlight 3U2D - 3-Lamps Uplight, 2-Lamps Downlight 3U3D - 3-Lamps Uplight, 3-Lamps Downlight ¹ WM only	Mounting Method CM - Adjustable Aircraft Cable PM - Pendant Mount WM - Wall Mount See pages 178-179 for other hanging methods.	Ballast Type NOTE Ballast nomenclature has changed. See page 177 for details. E - Electronic, Instant Start (Standard for T8) EP - Electronic, Programmed Start (Standard for T5 & T5HO, optional for T8) ED - Electronic, Dimming, 0-10V Standard ESD - Electronic, Step Dimming (Contact factory) Unless specified, Alera will use fewest ballasts possible.	Finish MW - Matte White (Standard) See page 175 for other color selections.	Options RT - Rotatable Housing GLR - Fast Blow Fuse GMF - Slow Blow Fuse EL - Emergency Battery Pack CSA - UL listed or CSA certified for Canada TBAR - T-Bar Mounting LR - Left/Right Switching** UB - Upper Lower Switching** IBOB - Inboard/Outboard Switching** DL - Damp Label **Switching configuration must be provided.
		Uplight Shielding CLA - Clear Prismatic Acrylic Lens* U - Unshielded *Not available with T5HO lamps.			

Cross Sections

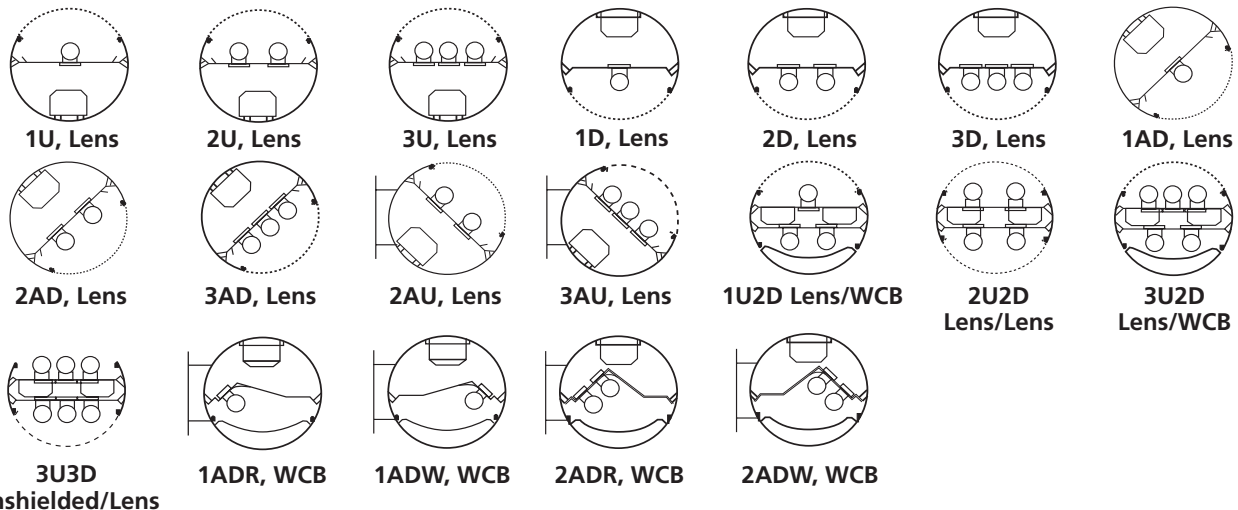

TUBES