


Optional sculpted end cap shown.

- Curved shape combines with parabolic louver for a pleasing and efficient profile
- Excellent for general office, banking, retail, and educational environments
- T8, T5, or T5HO
- Parabolic louver is silver, low iridescent (LD)
- Heavy 20-gauge construction provides excellent housing rigidity
- Direct/indirect distribution with approximately 40% downlight is standard. Other distributions available.
- Fixed 18" (FCM18) or optional Adjustable 48" (CM48) or 96" (CM96) aircraft cable suspension where applicable
- Patented die-cast joiners (patent #6,796,676 B) and end caps ensure straight rows with no light leak
- Consistent, predictable mounting locations are contractor-friendly
- UL listed 1598

**ORDERING INFORMATION**

<b>CVL</b> - [ ] - [ ] - [ ] - [ ]		[ ] - <b>LD</b> - [ ]		<b>U</b> - <b>MW</b> - [ ]	
MODEL	DISTRIBUTION	SHIELDING	VOLTAGE	FINISH	OPTIONS
CVL Cürv Louvered	<b>Blank</b> 60% Uplight, 40% Downlight <b>0/100</b> 0% Uplight, 100% Downlight <sup>2</sup> <b>20/80</b> 20% Uplight, 80% Downlight <sup>2</sup> <b>40/60</b> 40% Uplight, 60% Downlight <sup>2</sup> <b>85/15</b> 85% Uplight, 15% Downlight <b>CLC</b> Center lamp cover A/V mode <sup>2</sup>	<b>LD</b> Low Iridescent Semi-Specular Louver (Std.)	<b>U</b> 120V-277V	<b>MW</b> Matte White	<b>DC</b> Dust Cover (T8 and T5 with standard distribution) <b>SCE</b> Shallow Cürv End Cap (5 5/16" each) <b>LR</b> Left/Right Switching (2-Lamp only) <b>IBOB</b> Inboard/Outboard Switching (3-Lamp only) <b>EL</b> One Emergency Battery Pack <sup>3,4</sup> <b>FO841</b> With T8 4100K Lamp Installed <b>F5841</b> With T5/T5HO 4100K Lamp Installed <b>FO835</b> With T8 3500K Lamp Installed <b>F5835</b> With T5/T5HO 3500K Lamp Installed
ROW LENGTH	LAMP TYPE & PROFILE	MOUNTING METHOD	ADJUSTABLE CABLE LENGTH	BALLAST	
<b>4</b> 4' Single <b>8</b> 8' Single - Indicate row length over 8' in 4' increments <b>Note:</b> Rows over 8' will be configured by Alera. Example: 16' will be (2) 8'. Alternate configurations: contact factory.	<b>1T5</b> 1T5 Lamp <sup>1</sup> <b>2T5</b> 2T5 Lamps <sup>1</sup> <b>3T5</b> 3T5 Lamps <sup>1</sup> <b>1T5HO</b> 1T5HO Lamp <sup>1</sup> <b>2T5HO</b> 2T5HO Lamps <sup>1</sup> <b>3T5HO</b> 3T5HO Lamps <sup>1</sup> <b>1T8</b> 1T8 Lamp <b>2T8</b> 2T8 Lamps <b>3T8</b> 3T8 Lamps	<b>FCM18</b> Fixed Aircraft Cable Mount (2-Lamp only) 18" <b>CM</b> Adj. Aircraft Cable Mount	<b>48</b> 48" <b>96</b> 96"	<b>E</b> Electronic, Instant Start (Std. for T8) <b>EP</b> Electronic, Programmed Start (Std. for T5 & T5HO, optional for T8) <b>EPSYLSN</b> Osram .88 BF Programmed Start T8 Only <b>EPSYLSX</b> Osram .71 BF Programmed Start T8 Only Unless specified, Alera will use fewest ballasts possible.	
<sup>1</sup> T5/T5HO at risk for socket shadow in downlight component. <sup>2</sup> Dust cover not available when using these optical distribution covers. <sup>3</sup> Specify voltage. For additional, specify quantity before nomenclature (Example: 2EL120). <sup>4</sup> EL is installed in right hand side of 8' unit.					

**MOUNTING INFORMATION - SUSPENDED**

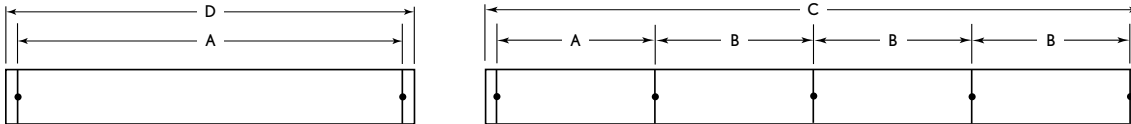

Nominal Length	Approx. Weight (lbs.)			A	B	C	D
	1-Lamp	2-Lamp	3-Lamp				
<b>Flat End Cap</b>							
4'	14.8	17.1	19.4	47 1/4"	48"	192 5/8"	48 5/8"
8'	26.3	28.6	30.9	95 1/4"	96"	384 5/8"	96 5/8"
<b>Sculpted End Cap</b>							
4'	15.8	18.1	20.4	47 1/4"	48"	202 5/8"	58 5/8"
8'	27.3	29.6	31.9	95 1/4"	96"	394 5/8"	106 5/8"

Note: Suspension data is computed using the standard aircraft cable assembly. Approximate weights based on single circuit.



Optional profile generic factory installed EL packs available. See page 17 for details.  
Optional Sculpted End Cap available. Add suffix "SCE" to end of catalog number.

