

**IDC**


- A gently pointed shape enhances this curved profile
- Primarily indirect, IDC is well-suited to office, education, and health care where uplight is desired as the primary source
- T8 lamp
- Heavy 20-gauge construction provides excellent housing rigidity
- 3-1/8" deep housing is gently angled for visual interest
- Solid housing (S) offers 100% indirect light
- Perforated housing option (PERF), shown above left, allows +/- 5% downlight
- All perforated housing (AP), shown above right, provides a continuous glow across the width of the unit with about 10% downlight
- Fixed 18" (FCM18) or optional Adjustable 48" (CM48) and 96" (CM96) aircraft cable suspension
- Finger tab connections for quick and easy alignment
- Modular mounting points for predictable hanging locations
- UL listed 1598

## ORDERING INFORMATION

<b>IDC</b>							<b>U</b>	<b>MW</b>	
<b>MODEL</b> IDC Indecon		<b>HOUSING TYPE</b> PERF Perforated S Solid AP All Perforated (2T8 only)		<b>ADJUSTABLE CABLE LENGTH</b> 48 48" 96 96"			<b>VOLTAGE</b> U 120V-277V	<b>FINISH</b> MW Matte White	
<b>ROW LENGTH</b> 4 4' Single 8 8' Single - Indicate row length over 8' in 4' increments <b>Note:</b> Rows over 8' will be configured by Alera. Example: 16' will be (2) 8'. Alternate configurations: contact factory.	<b>LAMP TYPE &amp; PROFILE</b> 1T8 1T8 Lamp (Solid only) 2T8 2T8 Lamps 3T8 3T8 Lamps	<b>MOUNTING METHOD</b> FCM18 Fixed Cable Mount (Non-adjustable Std.) 18" CM Adjustable Aircraft Cable Mount	<b>BALLAST</b> E Electronic, Instant Start (Std. for T8) EP Electronic, Programmed Start (Optional for T8) EPSYLSN Osram .88 BF Programmed Start T8 Only EPSYLSX Osram .71 BF Programmed Start T8 Only	<b>OPTIONS</b> DC Dust Cover LR Left/Right Switching (2-Lamp only) IBOB Inboard/Outboard Switching (3-Lamp only) EL One Emergency Battery Pack <sup>1,2</sup> FO841 With T8 4100K Lamp Installed FO835 With T8 3500K Lamp Installed					

<sup>1</sup> Specify voltage. For additional, specify quantity before nomenclature (Example: 2EL120).  
<sup>2</sup> EL is installed in right hand side of 8' unit.

## MOUNTING INFORMATION – SUSPENDED

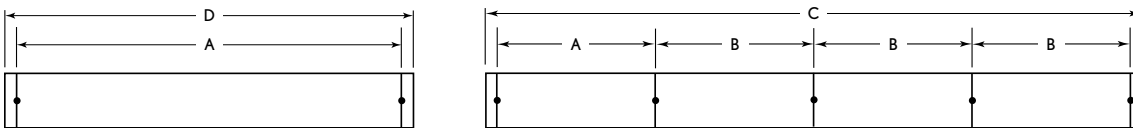

4', 8', 12' Single

4', 8', 12' Rows

Nominal Length	Approx. Weight (lbs.)			A	B	C	D
	1-Lamp	2-Lamp	3-Lamp				
4'	14.8	17.1	19.4	47 1/2"	48"	192 1/8"	48 1/8"
8'	26.3	28.6	30.9	95 1/4"	96"	384 1/8"	96 1/8"
12'	35.5	40.1	42.4	143 1/2"	144"	576 1/8"	144 1/8"

**Note:** Suspension data is computed using the standard aircraft cable assembly and standard flat end cap. Approximate weights based on single circuit.

■ Optional profile generic factory installed EL packs available. See page 17 for details.

Total Luminaire Efficiency  
**84.2%**  
 Test #12154  
 IDC 2T8 S